ULTRALIGHTS

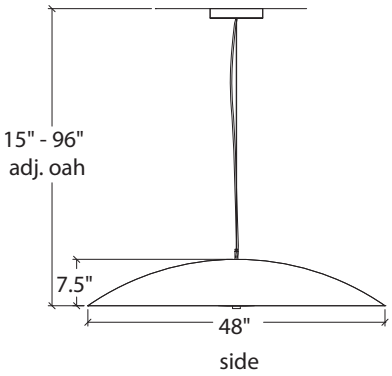





CIRRUS 17384-48

Base Specifications:
48″dia x 7.5″h x 15″ - 96″adj OAH
04: LED - 49.4W (Dim w/ 0-10V dim system)
Opal Acrylic Bottom Diffuser
Cable hung*

Notes:
04 Lamping: Wattage and Lumens - Initial at the source, no black power cord

17384-48	-		-		-	
MODEL		FINISH		DIFFUSER		LAMPING

***Modifications:**
☐ Cable hung (Standard)
☐ Stem mount: ____ OAH

Other Modifications:

BA - Bronze Age
BK - Black
BP - Black Pearl
CB - Cast Bronze
CH - Chestnut
DI - Dark Iron
EB - Empire Bronze
MB - Medieval Bronze
NB - New Brass
SB - Smokey Brass
SP - Satin Pewter
SS - Smoked Silver

PREMIUM
CR - Chrome

OA - Opal

04: Dry / Damp LED - 82.6W - 12,968 Lumens
No Black Power Cord
☐ (Dim w/ Std Phase Dim) - 120V
☐ (Non-Dim or Dim w/ 0-10V Dim system) Universal

COLOR TEMPERATURE / CRI

☐ 3000K (Standard) - CRI available upon request
☐ 2700K - CRI available upon request
☐ 3500K - CRI available upon request
☐ 4000K - CRI available upon request

Project Name: Project Location:	Specifier Name: Specifier Location:	Quantity: Fixture Type:

320 S Plumer Avenue • Tucson, AZ 85719 • p +1 520 623 9829 • info@ultralightslighting.com