


## DUO 19441-50

### Base Specifications:

50" dia x 5"h x 29" - 96" adj OAH  
 04: LED - 49.4 (Dim w/0-10V dim system)  
 Opal Acrylic Bottom Diffuser  
 Cable hung\*

### Notes:

04 Lamping: Wattage and Lumens - Initial at the source, no black power cord  
 Shown in: CL - Cloverleaf

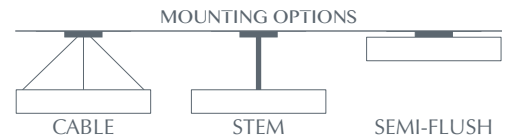

<b>19441-50</b>	-	-	-	-
<b>MODEL</b>		<b>PERF</b>	<b>FINISH</b>	<b>DIFFUSER</b>
				<b>LAMPING</b>

#### \*Modifications:

- Cable hung (Standard)
- Stem mount: \_\_\_\_ OAH
- Semi-flush mount (1" - 1.5" from ceiling to top of fixture)

#### Other Modifications:

#### A1 - Angles



#### CL - Cloverleaf



#### RD - Round



- BA - Bronze Age
- BK - Black
- BP - Black Pearl
- CB - Cast Bronze
- CH - Chestnut
- CR - Chrome
- DI - Dark Iron
- EB - Empire Bronze
- MB - Medieval Bronze
- NB - New Brass
- SB - Smokey Brass
- SP - Satin Pewter
- SS - Smoked Silver

#### OA - Opal

- 04: Damp / Dry LED - 82.6W - 12,968 Lumens - No Black Power Cord
- (Dim w/ Std Phase Dim) - 120V
- (Non-Dim or Dim w/ 0-10V Dim system) - Universal

#### COLOR TEMPERATURE / CRI

- 3000K (Standard) - CRI available upon request
- 2700K - CRI available upon request
- 3500K - CRI available upon request
- 4000K - CRI available upon request

Project Name:  
Project Location:

Specifier Name:  
Specifier Location:

Quantity:  
Fixture Type: